


Dimensions	5,88 4626	5,88 4632
A Work Height	32' (9.75 m)	38' (11.58 m)
B Raised Platform Height	26' (7.92 m)	32' (9.75 m)
C Lowered Platform Height	45' (1.54 m)	48.5' (1.23 m)
D Overall Width	48" (1.17 m)	48" (1.17 m)
E Overall Length	91" (2.31 m)	91" (2.31 m)
F Stowed Height (Rais Up)	84.5" (2.15 m)	80" (2.24 m)
G Stowed Height (Rais Down)	70.5" (1.79 m)	74" (1.88 m)
H Platform Width (Inside Dimension)	42" (1.07 m)	42" (1.07 m)
I Platform Length (Inside Dimension)	84" (2.13 m)	84" (2.13 m)
Specifications	5,88 4626	5,88 4632
Extension Deck (Roll Out)	4' (1.22 m)	4' (1.22 m)
Ground Clearance (Stowed)	3.5" (8.89 cm)	3.5" (8.89 cm)
Ground Clearance (Raised)	0.75" (1.91 cm)	0.75" (1.91 cm)
Wheelbase	69" (1.75 m)	69" (1.75 m)
Weight	4,700 lbs (2,132 kg)	5,075 lbs (2,302 kg)
Gradeability	30%	25%
Turning Radius (Inside)	47.5" (1.21 m)	47.5" (1.21 m)
Turning Radius (Outside)	93.5" (2.37 m)	93.5" (2.37 m)
Lift Time (With Rated Load)	54 sec	59 sec
Lower Time (With Rated Load)	32 sec	49 sec
Drive Speed (Stowed)	2 mph (3.2 km/h)	2 mph (3.2 km/h)
Drive Speed (Raised)	0.6 mph (1 km/h)	0.6 mph (1 km/h)
Maximum Drive Height	Full Height	Full Height
Capacity (Overall)	1,000 lbs (454 kg)	700 lbs (318 kg)
Distributed Capacity (Main Platform)	700 lbs (318 kg)	450 lbs (204 kg)
Distributed Capacity (Extension Deck)	300 lbs (136 kg)	250 lbs (113 kg)
Local Floor Load (With Rated Load)	235 psi (1620 kPa)	220 psi (1517 kPa)
Overall Floor Load (With Rated Load)	191 psi (9 kPa)	204 psi (10 kPa)
Maximum # of Persons	3	2
Wind Rating	28 mph (12.5 m/s)	28 mph (12.5 m/s)
Tire Type	Solid, N/M	Solid, N/M
Tire Size	16 x 5 x 12	16 x 5 x 12

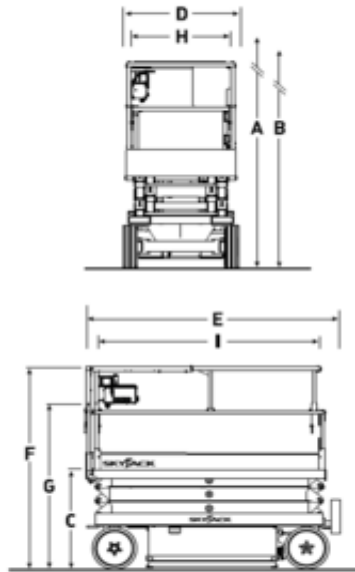

Wyszukiwarka maszyn

ESN118

Machine rental classification

11.8

300

Wymagana odzież ochronna



## Specyfikacja

Napęd podnoszenia	Elektryczny
Napęd	Elektryczny
Maksymalna wysokość robocza (m)	11.8
Maksymalna wysokość platformy (m)	9.8
Maksymalny wysięg roboczy (m)	
Udźwig załadunku (kg)	318
Waga (kg)	2302
Wymiary transportowe (dł x szer. x wys.)	2.3 x 1.2 x 1.9
Wymiary platformy (dł x szer.)	2.1 x 1.1

Liczba osób na platformie	2
Manerwowanie na wysokości	Tak
Ładowanie (V)	100-120v 220-240 V
Teren i opony	Wewnątrz, Bez znakowania Twardy